


ADJUST START TIME VALUE
TO LET THE MOTOR REACH FULL SPEED

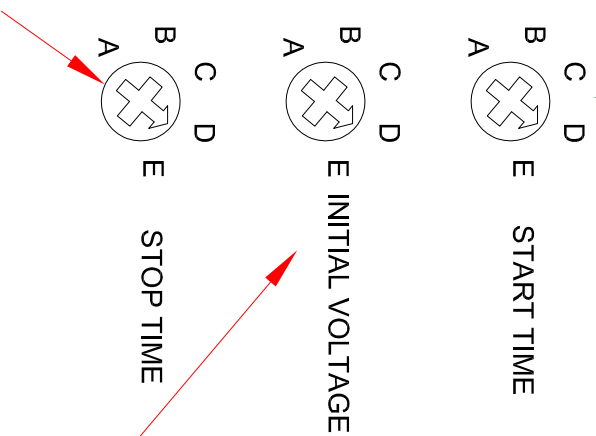


STOP TIME NOT USED

ADJUST BOOST VALUE
PER MOTOR

MOTOR	START t	INIT v	STOP t
DRYER*	D	C	N/A
HP PUMP	B	E	N/A
PREP	A-B	A-B	N/A
HYD CONV	A-B	A-B	N/A

* FOR SLOW STARTING EQUIPMENT, DO NOT START THE NEXT MOTOR UNTIL THE PREVIOUS SOFT START IS BEYOND IT'S STARTING TIME



VEHICLE WASHING
EQUIPMENT

48285 Frank Street
Wixom, Michigan 48393
www.motorcitywashworks.com

REVISIONS

LVL | DATE | ENGR. | DESCRIPTION

DRAWN: ML | DATE: 10-10-11
SCALE: 1:2 | PAPER: 11" X 17"

HARD COPY IS INTENDED TO
BE ANSIB WHEN PRINTED
SCALE(S) ARE NOT ACURATE
FOR ANY OTHER SIZE

ALTISTART ATS01...
208 or 460VAC-3PH SOFT START